



FAMILY OF MEDIUM TACTICAL VEHICLES

FMTV | CARGO 4x4 / 6x6



Capacity To Move. Oshkosh Defense® FMTV Cargo 4x4 and 6x6.

The Oshkosh Defense® FMTV cargo 4x4 and 6x6 deliver the support, effectiveness and confidence military personnel need to fulfill their missions. Whether moving personnel or supplies, the FMTV cargo vehicle is efficient and reliable.

As an integral part of the supply and logistics chain, the FMTV cargo 4x4 and 6x6 are examples of the exceptionally built Oshkosh FMTV variants meeting the Army combat support initiative. Superior manufacturing and rugged, durable components assure long-term reliability in even the most extreme conditions.

A Long-Term Armor Strategy-compliant cab and other advanced technologies offer enhanced protection. And with the defense expertise and proven production capabilities of Oshkosh, each FMTV cargo 4x4 and 6x6 will meet all delivery requirements.

FMTV | CARGO 4x4/6x6 | FAMILY OF MEDIUM TACTICAL VEHICLES

- Easily maneuverable
- Long-Term Armor Strategy-compliant cab
- C-130 air transportable
- Electronic Central Tire Inflation System (CTIS)
- 3 person; ergonomically adjustable driver seat and steering wheel for greater crew comfort

FMTV 4x4

Length: 265 in. (6739 mm)

Width: 96 in. (2438 mm)

Height: 111 in. (2830 mm)

Wheel Base: 153 in. (3899 mm)

Approach/Departure Angle: 40°/40°

Vehicle Curb Weight w/Fuel: 22,904 lbs. (10389 kg)

Payload: 5,000 lbs. (2268 kg) plus kits

Towed Load: 12,000 lbs. (5443 kg)

Maximum Speed Governed at Gross Weight:

55 mph (89 km/h)

Range: 56 gal. (212 L) nominal 300+ mi. (483+ km)

Maximum Grade/Side Slope: 60%/30%

Cab Design: 3 person • ergonomically adjustable driver seat and steering wheel

Engine: Caterpillar® C7 heavy-duty diesel • 6 cylinder

- electronically controlled • fuel injected

- turbocharged and aftercooled • EPA certified

Transmission: Allison® MD 3700 SP automatic/select

7 speed • electronically controlled

Optional: Winch

FMTV 6x6

Length: 286 in. (7272 mm)

Width: 96 in. (2438 mm)

Height: 111 in. (2830 mm)

Wheel Base: 161 in. (4100 mm)

Approach/Departure Angle: 40°/40°

Vehicle Curb Weight w/Fuel: 24,870 lbs. (11281 kg)

Payload: 10,000 lbs. (4536 kg) plus kits

Towed Load: 21,000 lbs. (9525 kg)

Maximum Speed Governed at Gross Weight:

55 mph (89 km/h)

Range: 56 gal. (212 L) nominal 300+ mi. (483+ km)

Maximum Grade/Side Slope: 60%/30%

Cab Design: 3 person • ergonomically adjustable driver seat and steering wheel

Engine: Caterpillar® C7 heavy-duty diesel • 6 cylinder



- electronically controlled • fuel injected

- turbocharged and aftercooled • EPA certified

Transmission: Allison® MD 3700 SP automatic/select

7 speed • electronically controlled

Optional: Winch

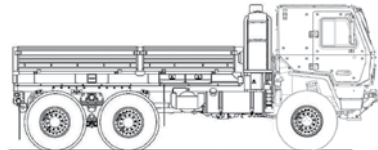

Oshkosh Corporation
2307 Oregon Street, P.O. Box 2566 • Oshkosh, WI, USA 54903-2566
ph 1.920.235.9150 • fax 1.920.233.9506
Washington, DC Office
1300 North 17th Street, Suite 1040 • Arlington, VA, USA 22209
ph 1.703.525.8400 • fax 1.703.525.8408

©2010 OSHKOSH CORPORATION Oshkosh and the Oshkosh logo are registered trademarks of Oshkosh Corporation, Oshkosh, WI, USA. All other trademarks are property of their respective owners.

oshkoshdefense.com